


# How program is compiled in C

Assuming that there are two files to be compiled in C, the overall flow to yield an executable is the following:

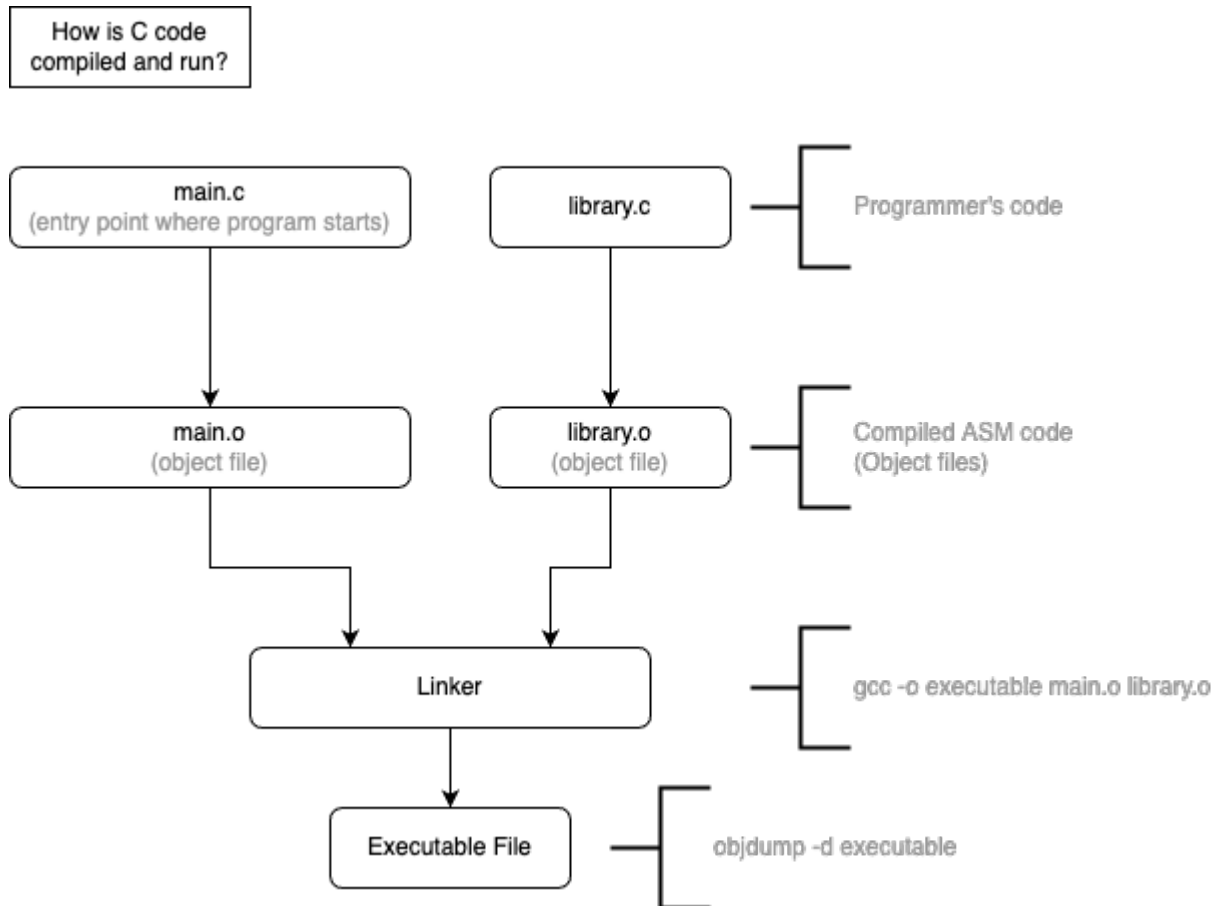

The commands used to compile the two files above are:

```
gcc -c library.c
gcc -c entry_point.c
gcc -o executable library.o entry_point.o
# Run the program: ./executable
```

Revision #1

Created 2 years ago by [Preet Kang](#)

Updated 2 years ago by [Preet Kang](#)